



U.S. Army Research, Development and Engineering Command



***TECHNOLOGY DRIVEN. WARFIGHTER FOCUSED.***

## Tactical Checkpoint: Hail/Warn Suppress/Stop Target Behavioral Response Laboratory

Elizabeth Mezzacappa, Ph.D.; Charles Sheridan, BA; Robert DeMarco, MSBME; Kevin Tevis, BSME; Gladstone Reid, MSBME; Kenneth Short, Ph.D.; Nasir Jaffery, BSEE, MBA; Gordon Cooke, MEME; John Riedener, MSSE

Directed Energy Professional Society, Annual Symposium, Bethesda, Maryland, November, 19 2010

Report Documentation Page		Form Approved OMB No. 0704-0188
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.		
1. REPORT DATE <b>15 NOV 2010</b>	2. REPORT TYPE <b>Conference Presentation</b>	3. DATES COVERED <b>00-00-2008 to 00-00-2010</b>
4. TITLE AND SUBTITLE <b>TACTICAL CHECKPOINT- HAIL/WARN AND -SUPPRESS/STOP Presented at the 2010 Directed Energies Professional Society Meeting, 15-19 November 2010.</b>		5a. CONTRACT NUMBER
		5b. GRANT NUMBER
		5c. PROGRAM ELEMENT NUMBER
6. AUTHOR(S) <b>Elizabeth Mezzacappa; Charles Sheridan; Robert DeMarco; Kevin Tevis; Gladstone Reid</b>		5d. PROJECT NUMBER
		5e. TASK NUMBER
		5f. WORK UNIT NUMBER
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Army, ARDEC, Target Behavioral Response Laboratory, RDAR-EIQ-SD, Building 3518, Picatinny Arsenal, NJ, 07806-5000</b>		8. PERFORMING ORGANIZATION REPORT NUMBER
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>		
13. SUPPLEMENTARY NOTES <b>The other authors are Kenneth Short, Nasir Jaffery, Gordon Cooke, and John Riedener.</b>		
14. ABSTRACT <b>This presentation reports the findings from four experimental investigations of the effectiveness of tools and technologies that may be employed, or have been considered for employment, in military operations at tactical checkpoints in daylight conditions. The items under investigation included the B.E. Meyers green beam designator (GBD-III-C), high intensity red, green, and white light (Multi-Chromatic Non-Coherent (MCNC) light), and windshield obscuration. The laser and MCNC light were evaluated for their hailing and warning capabilities or, in other words, their ability to communicate a warning to a driver that is approaching a checkpoint. The laser, MCNC light, and the windshield obscuration were evaluated for their suppression capabilities (ability to suppress or stop a driver from proceeding towards the tactical checkpoint). Effectiveness of devices for hailing and warning was measured by how reliably the stimuli were perceived and understood, what percentage of the time the device caused compliance in a non-hostile driver, and time taken to comply with instructions. Effectiveness of devices for suppressing and stopping was measured by whether the stimuli were sufficiently aversive to: (1) convince the driver to choose to stop, (2) impair the ability of driver to navigate or successfully operate the vehicle, or (3) impair the ability of the driver enough to cause a forced stop.</b>		
15. SUBJECT TERMS <b>non-lethal weapons, effectiveness metrics, driving, lasers, green laser distractor, optical suppression, human behavior, checkpoint, ambient light, driver suppression, human experimentation, light, paintball, obscuration, hail, warning, suppression, stop</b>		

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Public Release</b>	18. NUMBER OF PAGES <b>39</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

Gather empirical data on  
real human behavior in  
response to non-lethal  
weapons and systems  
using real people in  
tactically relevant  
situations



**TBRL** →



- Checkpoints are critical to peacekeeping and counterinsurgency operations.
- Security is a prime concern because checkpoints are often scenes of violence or have the threat of violence.
- Losses occur when using lethal fire on non-belligerents drivers mistakenly perceived to be a threat.



- To compare the effectiveness of several non-lethal energies, methods, and modalities
- For Hailing and Warning
  - To identify non-lethal devices and methods that can be unequivocally perceived and understood
- For Suppression
  - To identify effective non-lethal means to impede a driver's approach to a checkpoint



- 30 Drivers/Four Experiments/Two trials per condition
- Three Hail/Warn Experiments
  - Can subject see/hear/understand and comply with instructions?
  - Red, green, white non-coherent lights
  - Green dazzling laser
- Suppression Experiment
  - Does the driver hesitate, slow down, or stop?
  - Bright white light
  - Paintball windshield obscuration
  - Green dazzling laser
- Baselines Included (no light stimulus/obscurant presented)



- Testbed
  - Pressure hoses
  - Videorecorder
- Vehicle
  - Depressions of brake
  - Potentiometer recording of wheel turning
  - Accelerometer
  - Three video cameras (views of driver and driver's view out of front windshield)







Experimental Control Center  
UNCLASSIFIED- Approved for Public Release







## Track Lanes and Pressure Hoses

UNCLASSIFIED- Approved for Public Release



Instrumented Vehicle  
UNCLASSIFIED- Approved for Public Release





## Instrumented Vehicle

UNCLASSIFIED- Approved for Public Release



Green Dazzling Laser  
Mounted on Tripod with Red  
Dot Sight

UNCLASSIFIED- Approved for Public Release





Non-coherent lights  
UNCLASSIFIED- Approved for Public Release

## Natural Reactions

Drivers drove in a straight path, traveling down the middle of the three-channel lane.

Light stimuli (randomized order) presented 10m from the entrance to the channels

- 1.4-sec laser exposures
- 1-sec exposures of green, red, or
- white lights



## Question

What is the driver's natural reaction to these light stimuli when presented while driving?









Red Non-Coherent Light  
Stimulus

UNCLASSIFIED- Approved for Public Release

## Findings


- No subject naturally stopped in response to any of the light stimuli.
- The most frequent natural response to laser or non-coherent light stimuli: continue on straight as usual.
- No difference was noted in responses to each of the light stimuli.




## Understandability

Visual signs and auditory messages were paired with each of the light conditions.


“Right!”



“Stop!”



“Left!”







White Non-Coherent Light  
Stimulus

Slide 19




## Green Laser Distractor Light Stimulus

## Question

Do subjects comply with instructions delivered in combination with the hailing and warning stimuli?



Percent Compliance across Trial by Stimuli and Media

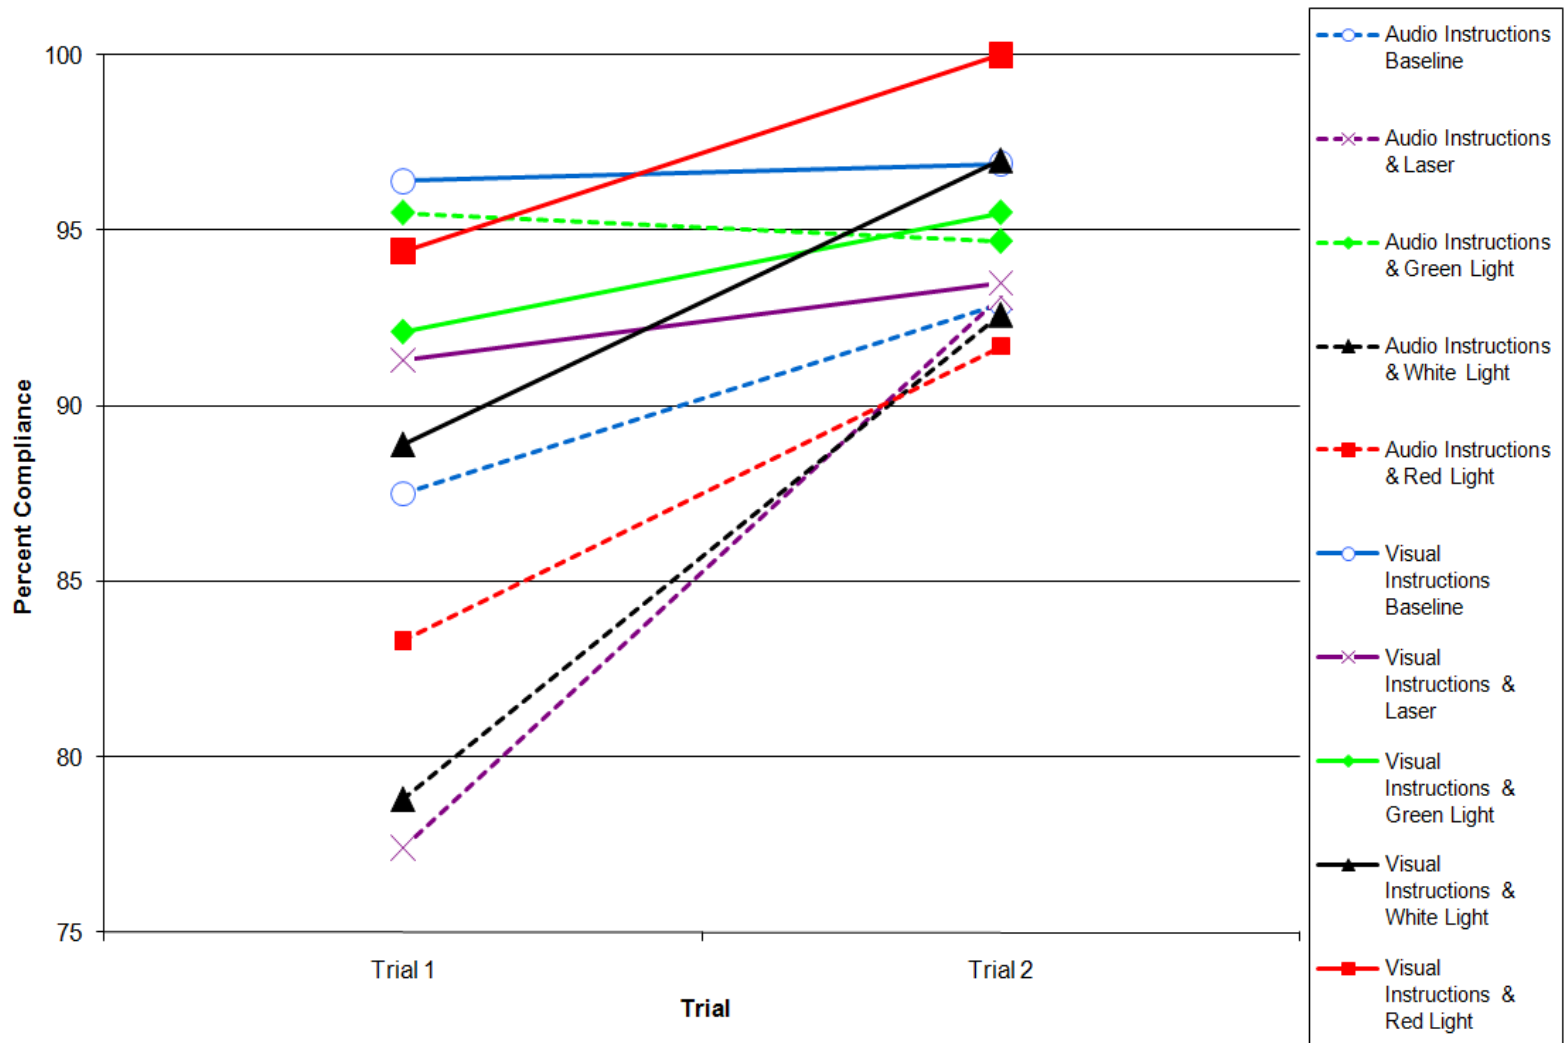



## Findings

- No significant differences detected among the laser or light stimuli in terms of compliance with instructions.
- Significant differences in compliance with the first versus second presentation of auditory instructions, such that the second presentation of instructions elicited greater compliance.



## Perceptibility

Subjects were informed ahead of time what to do when presented with each light stimulus:

- White Light- “Take Right Channel”
- Green Light (laser or non-coherent)-
- “Take Left Channel”
- Red Light- “Stop”
- If don’t see light- “Go Straight”



## Question

Can subjects perceive the light stimuli?

Assumption: drivers do not follow instructions when they do not perceive the light stimulus

Comparison: driver's compliance reactions to the different light stimuli


Conclusion: different reactions reflect different perceptibility of light stimuli



## Findings

- No differences in perceptibility among the different wavelengths of non-coherent colored lights.
- Laser was harder to see than the non-coherent lights (lower compliance when laser was presented).
- Significant negative correlation between ambient light and compliance rates under the laser presentation -- in other words, in darker settings it is reliably easier to see this laser light.



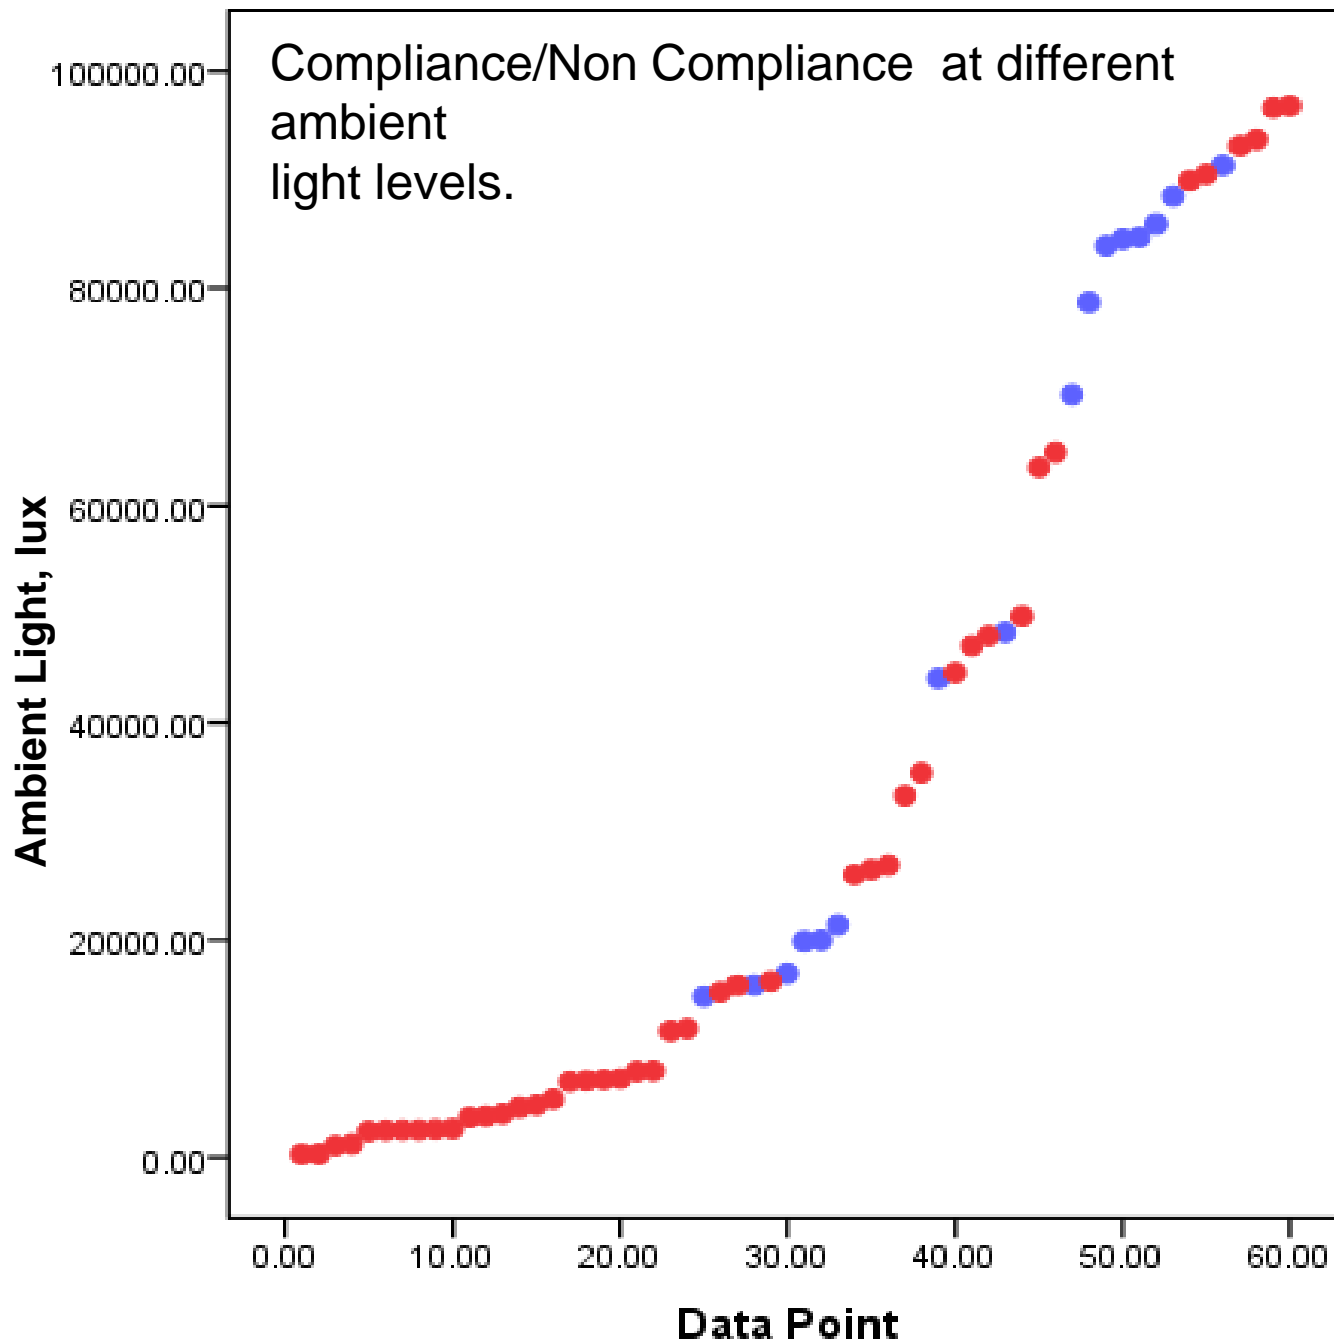

Subjects were exposed to potentially suppressive stimuli prior to driving a serpentine course:

- Green dazzling laser
- Non-coherent bright white light
- Windshield obscurants






## Green Dazzling Laser on Driver

UNCLASSIFIED- Approved for Public Release



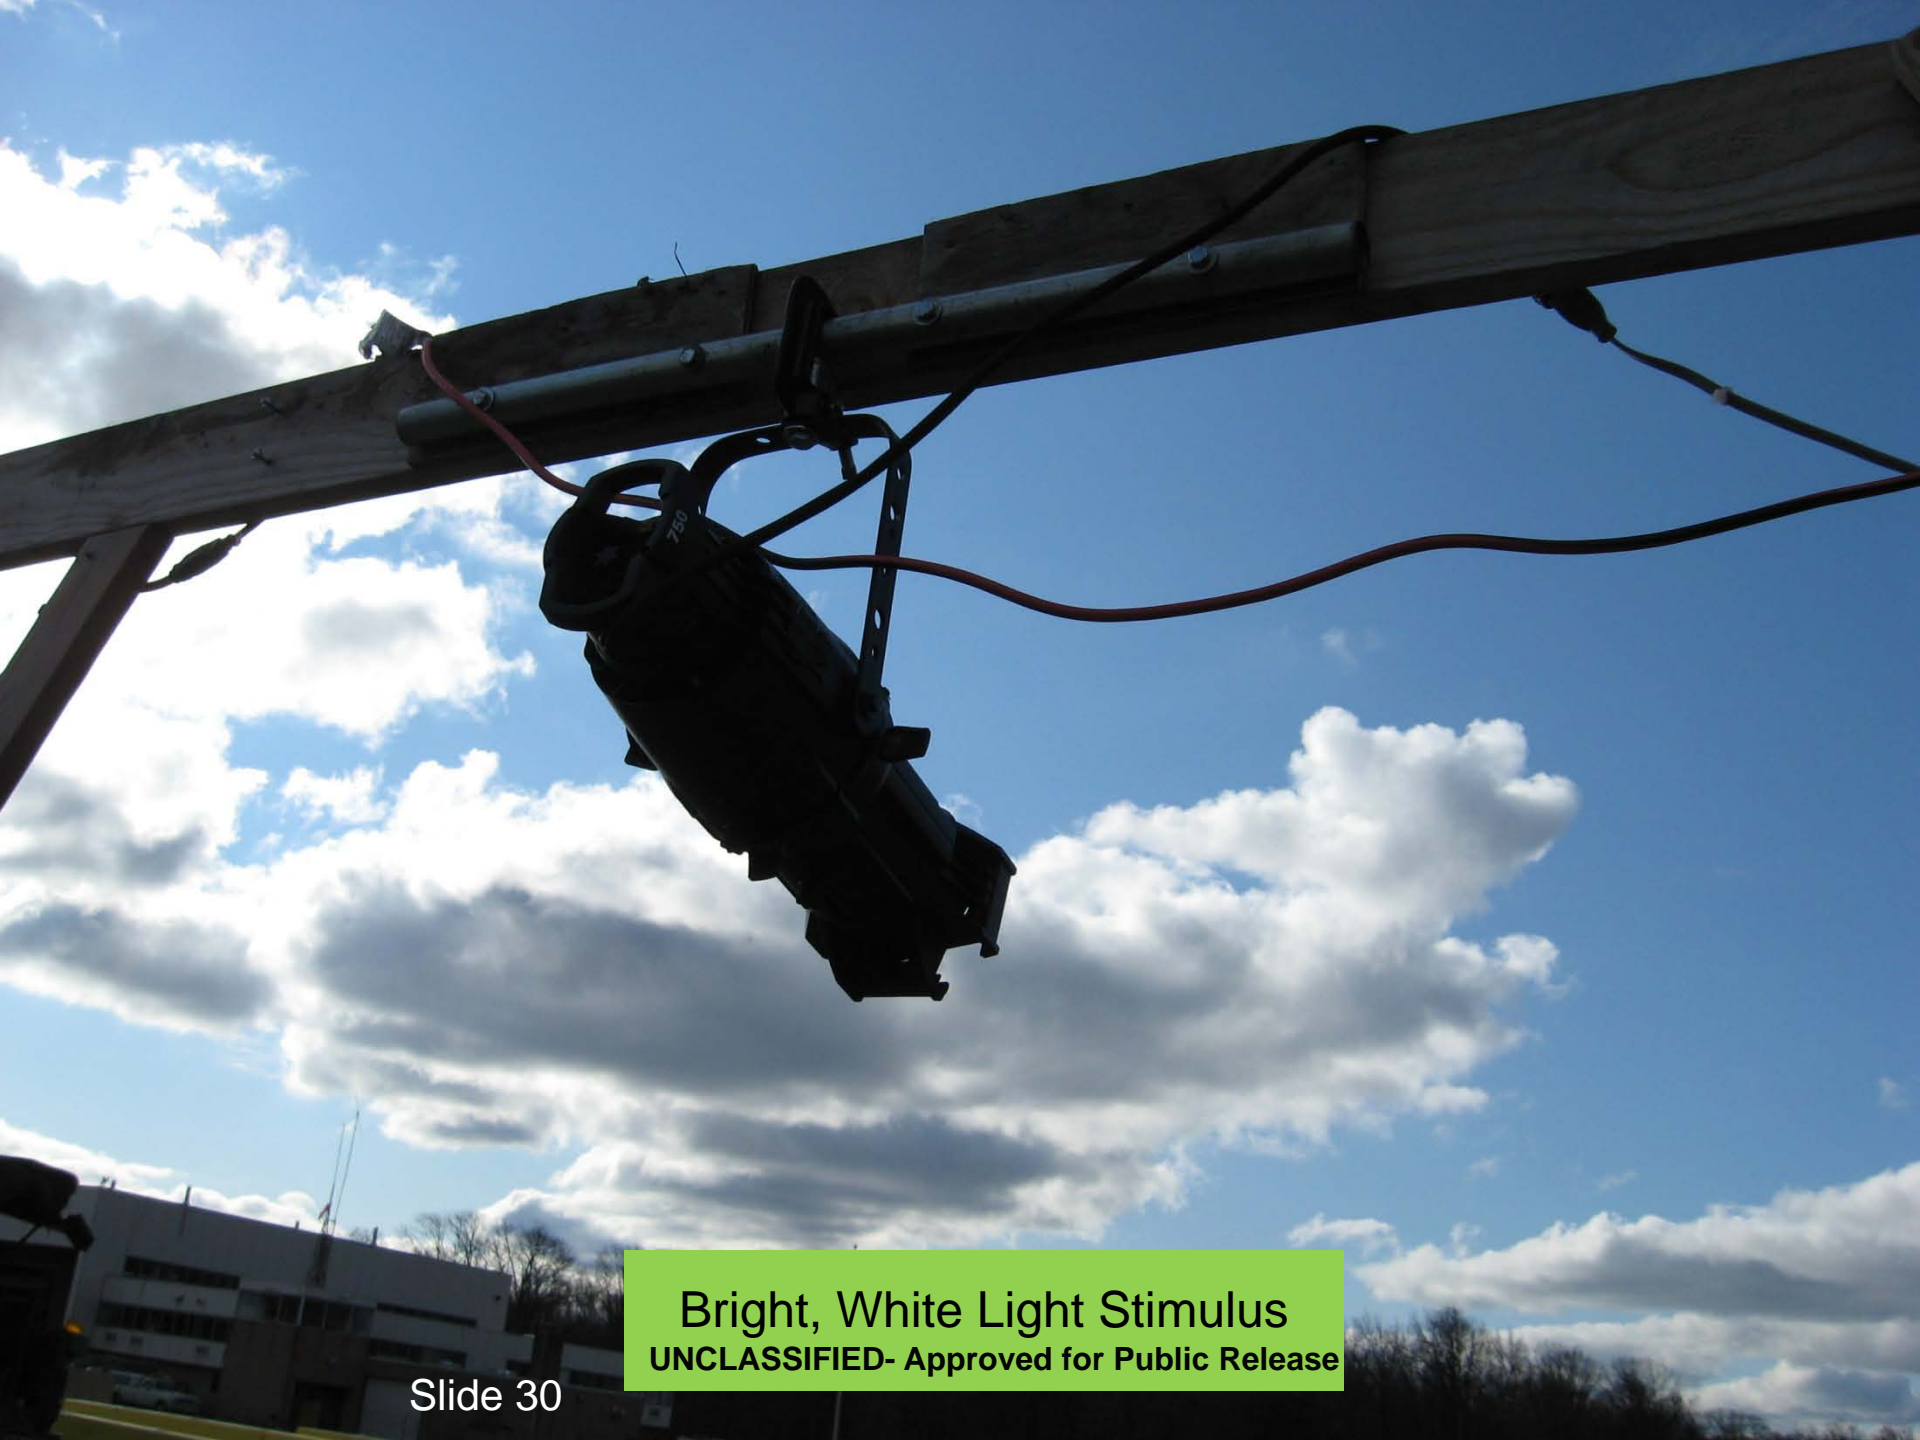

Bright, White Light Stimulus  
UNCLASSIFIED- Approved for Public Release





Bright White Light Mounting  
UNCLASSIFIED- Approved for Public Release



Bright White Light Stimulus on  
Driver  
UNCLASSIFIED- Approved for Public Release





## Paintball Array

UNCLASSIFIED- Approved for Public Release



Paintball Obscurant on Windshield

UNCLASSIFIED- Approved for Public Release

Slide 34

## Question

Do any of the three stimuli produce a suppressive effect?

- Can we make the driver choose to stop?
- Can we make the driver lose control of the vehicle?
- Can we make the driver hesitate?
- Can we make the driver slow down?





## Findings

- No driver stopped
- No driver hesitated upon entering serpentine
- No driver slowed down while navigating the serpentine
- Positive correlation between number of paintballs that hit the windshield and the time to drive through serpentine






Paintball Obscurant on  
Windshield

UNCLASSIFIED- Approved for Public Release

# Correlation Between Paintball Hits and Time Through the Serpentine

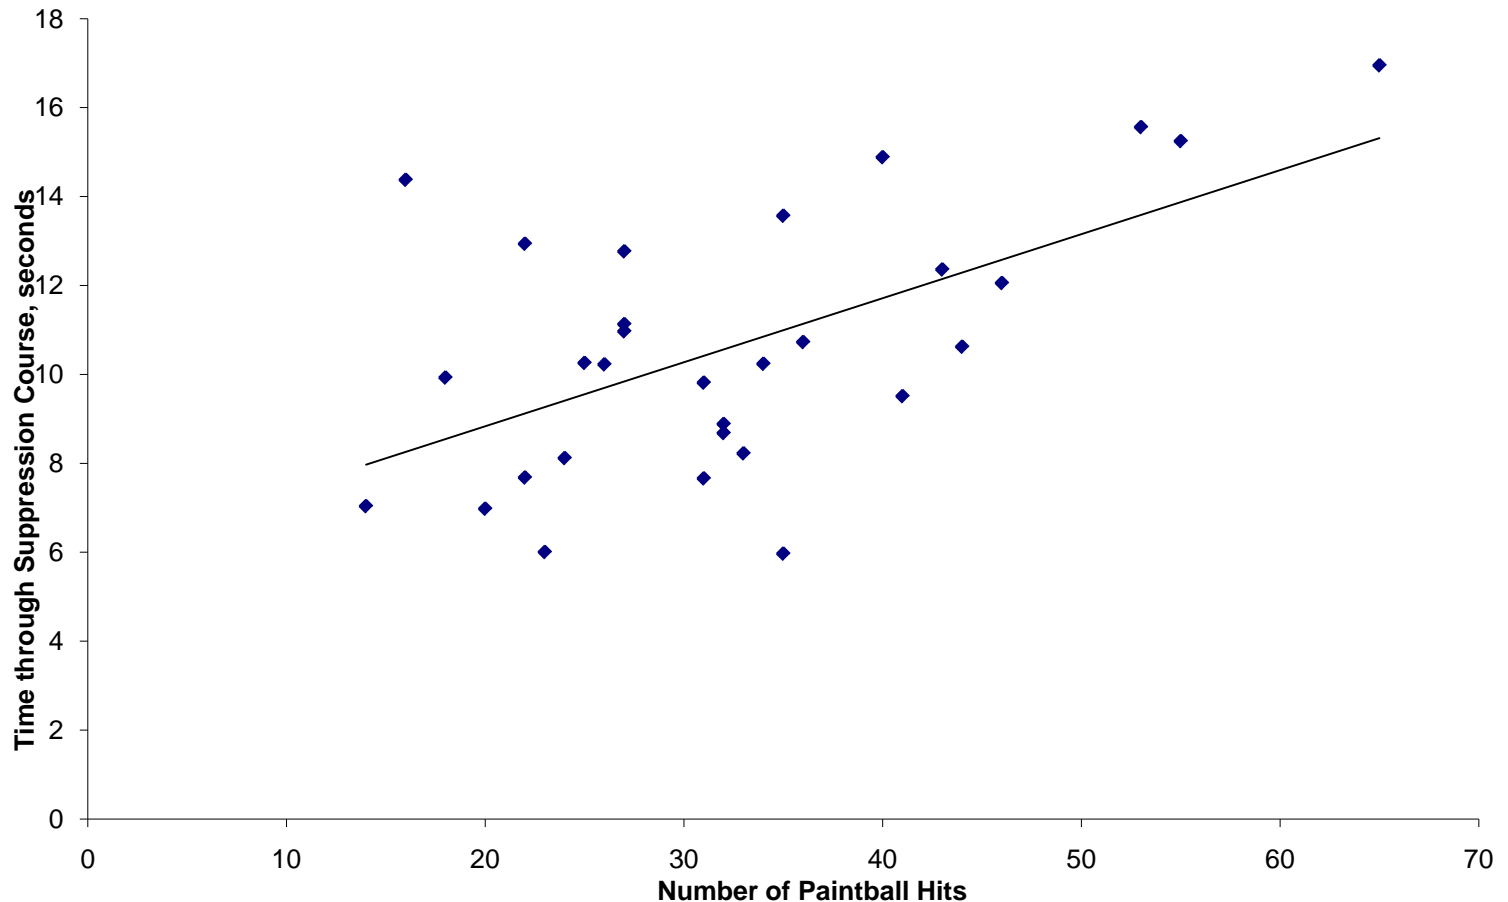



- Perceptibility is the key to compliance.
- The most effective hail/warn non-lethal system is the one that can be seen and/or heard by the drivers.
- In the day, compared with standard non-coherent light sources, laser light devices are more difficult to see.
- Multiple presentations of instructions are more effective at conveying the instructions of the message.
- In the daytime, lasers are ineffective in suppressing drivers approaching checkpoints at distances required for the target's safety (for this device, 47 m).
- None of the stimuli made drivers stop instinctively or reflexively. Even in subjects who were highly motivated to avoid hitting or contacting any barriers in the serpentine course, there was never a case where a subject chose to stop the vehicle for fear of crashing.
- Obscurants, methods of blocking the drivers from seeing where they are going, appear to be the most promising avenue of further research for suppressive effectiveness.



**TBRL** →

